


Comparative Study of Roundabout, Signalized and Unsignalized Intersection in
Tagaytay City

A Research Study Presented to the Faculty of Civil Engineering
College of Engineering, Architecture and Technology
De La Salle University-Dasmariñas
Dasmariñas, Cavite

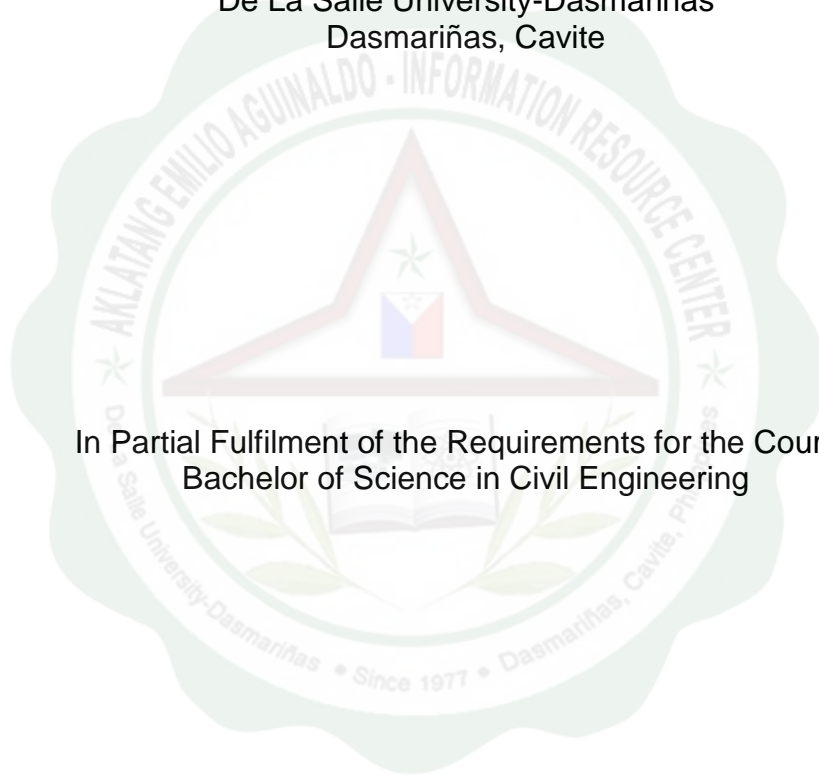

In Partial Fulfilment of the Requirements for the Course
Bachelor of Science in Civil Engineering

Submitted by:
Catapia, Emerson I.
Olivar, Mark Bernard N.
Servida, Nelson Christopher C.

March 2012

ABSTRACT

Tagaytay City, known as a tourist destination, is experiencing traffic congestion particularly on weekdays because of large volume of vehicles entering the city. Congestion usually occurs at Tagaytay City rotonda located near Olivarez Plaza which connects two major and two minor roads namely Emilio Aguinaldo Highway, Tagaytay-Nasugbu Road, Tagaytay-Talisay Road and Tagaytay-Calamba Road. Due to conflicts, large delay and queues are produced resulting to slow traffic flow. The study aims to determine the efficiency of roundabout in terms of traffic delay, length of queue, and level of service through volume-capacity ratio and degree of congestion and to compare it with the signalized and unsignalized intersection using the same traffic data gathered by the researchers and improve the traffic flow through the application in the said intersection. Present condition shows that reserved capacity of Tagaytay City rotonda yields to 549.73 and -160.27 during AM and PM peak hours which results in short traffic delay in the morning but become congested during the afternoon where large volume of vehicles are expected to enter the intersection.

Table of Contents

Acknowledgement	
Abstract	
Chapter 1: Introduction	
1.1 Background of the study	1
1.2 Statement of the problem	3
1.3 Objective of the study	4
1.4 Significance of the study	5
1.5 Scope and delimitation	6
1.6 Study framework	8
1.7 Definition of terms	9
Chapter 2: Review of Related Literature	
2.1 Volume Studies	11
2.1.1 Tallying	11
2.1.2 Using video cameras	11
2.2 Highway Capacity Manual 2000	12
2.2.1 Level of Service	12
2.2.2 Delay	13
2.2.3 Queue length	15
2.4 Intersection Design and Control	16
2.4.1 Analysis and design of roundabouts	16
2.4.2 Traffic signal control	17
2.4.2.1 Cycle	17
2.4.2.2 Allocation of green times	18
2.4.2.3 Capacity of movement or approach	18
2.4.2.4 Estimation of delay	19
2.4.3 Analysis of unsignalized intersections	19
2.5 Manual for uniform traffic control devices	23
2.6 Actual delay vs. theoretical delay for signalized and unsignalized intersection	26
Chapter 3: Methodology	
3.1 Data Gathering	28
3.1.1 Manual Vehicle Count	28
3.1.2 Geometric Parameters	29
3.2 Time Delay	29
3.3 Length of Queue	30
3.4 Level of Service	31
3.5 Data Analysis	31

Chapter 4: Data Presentation and Analysis	
4.1 Peak Hour	33
4.2 Level of Service	34
4.3 Time Delay	39
4.4 Length of Queue	42
4.5 Summary of Analysis	45
Chapter 5: Summary, Conclusion and Recommendations	
5.1 Summary	47
5.2 Conclusion	48
5.3 Recommendations	50
Bibliography	52
Appendices	
A. Traffic Count	54
B. Movements	58
C. Tables and Figures Constant	64
D. Geometric Parameters	69
E. Roundabout Computations	70
F. Signalized Intersection Computations	76
G. Unsignalized Intersection Computations	98
H. Tally Sheet	104
I. Other Documentation	154

